reddot design award

SUPER SLIM - THICKNESS 24,4 MM

WARNING LIGHT BAR

LED VARNINGSLJUSRAMP • LED VARSELLYSBJELKE

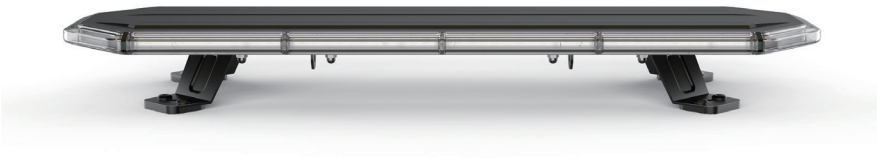

INSTRUCTION

BRIODLIGHTS

◉ 14 Modes



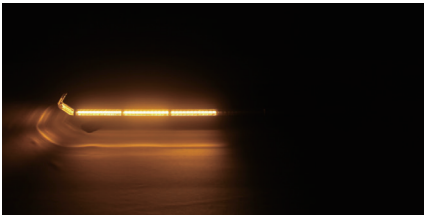


4 modes flash

① Single flash
② Double flash
③ Triple flash
④ Single flash Alt. Left & Right half

5 modes rotation

① Slow anticlockwise rotation
② Slow clockwise rotation
③ Quick anticlockwise rotation
④ Quick clockwise rotation
⑤ Rotation

2 cruise

① Steady light on
② Steady light on only corner

Night mode Class 2 50% reduction

3 modes arrow

① Center arrow
② Left arrow
③ Right arrow

Parameter

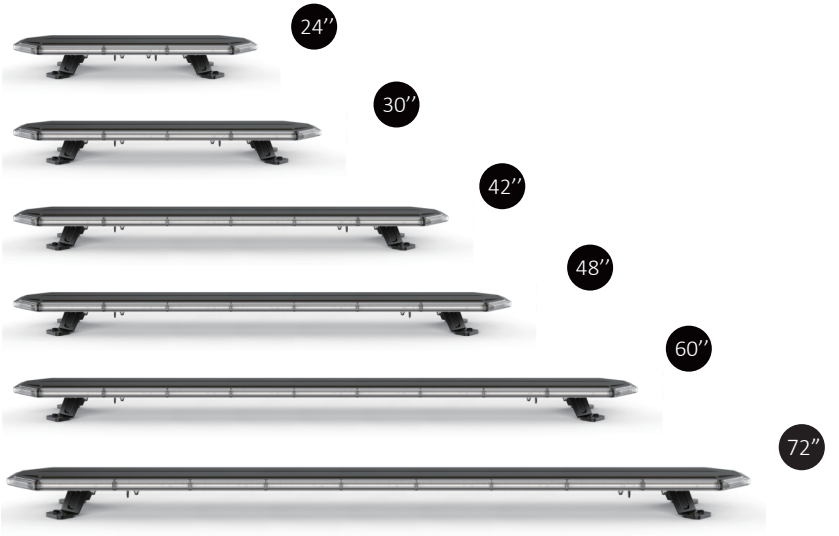

Item No.	Power Consumption	LED Q'TY	Compliance
14570	74W	36+72pcs	CISPR25 CIASS 3 SAE J845 ECE R65 TA2 ECE R10
14571	82W	36+96pcs	
14572	98W	36+144pcs	
14573	106W	36+168pcs	
14574	122W	36+216pcs	
14582	138W	36+264pcs	







◉ Content



Lamp X 1



Option X 1



Remote(option) X 1

Two control can be selected—Cable and Remote

◉ Cable connection

14570-24'' / 14571-30'' / 14572-42'' / 14573-48'' / 14574-60''

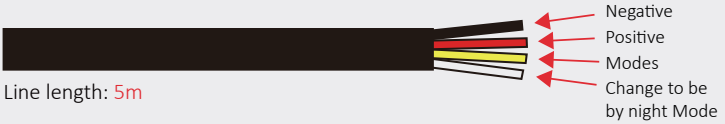

Line length: 5m

Connect Yellow wires to the Red for lasting 3 seconds, untill the light bar stay steady on , then you will see the different of brightness , release the Yellow wire to switch By Day or By Night .

Connect Light Bar Art.No 14582-72" like this:

- Red +
- Svart -
- Yellow + Class 2

Remote control instruction



Charging Attention
Charging Time: About 2 hours (Not support for Quick charge)

1. No anymore operation within 30seconds being standby mode ,press any key to wake it up .
2. No anymore operation within 2 minutes been power off, press ON/OFF to start.

◉ Remote control instruction

ON/OFF key:
Quickly press to turn ON the control box
Long press 3 seconds to turn OFF the control box
Quickly press to turn ON the light bar





DIY 1 and DIY 2 operation :DIY to set up your shortcut key mode
Turn to the mode to be your shortcut key , long press about 3 seconds DIY key , when the control show below sentence it means DIY successfully .
DIY mode set successfully.
Now release the key to exit.

When the first time to use the DIY key , the screen display will show below sentence:
DIY mode setting help
Press and hold the DIY key for
more than 3 seconds to store
the current mode.
Press mode key to exit.

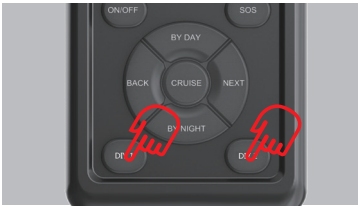





1. Pay attention to the temperature requirements of the working environment
2. Pay attention to the voltage requirements
3. Always consult you vehicle owners manual on compatibility with automobile lighting
4. Pay attention to legal requirements

SE: AB Karosseritillbehör
abkati.se

NO: Egil Verne AS
verne.no